
EEEEEEEEEEEE	DDDDDDDDD	DDD	TTT

EX

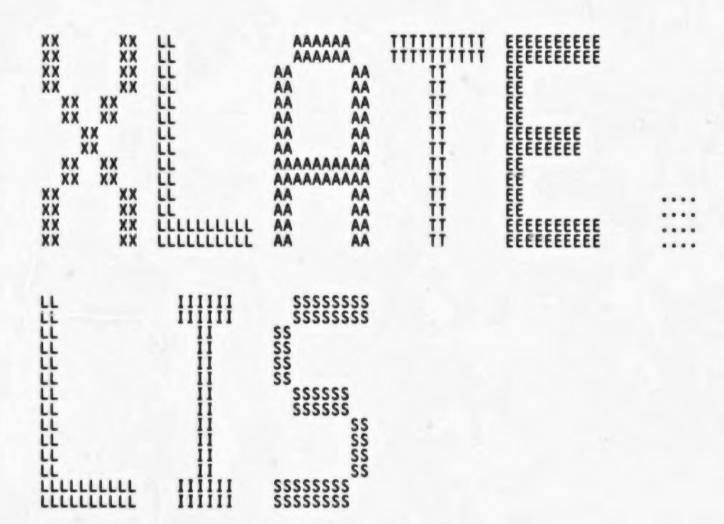

**

EDT\$XLATE - Default XLATE routine

EXE

Mod ---VAX VAX VAX VAX VAX VAX VAX VAX

VAX VAX

VAX

EDTSXLATE EDTS	CLATE - Default XLATE routine	16-Sep-1984 02:20:59 14-Sep-1984 12:25:56	VAX-11 Bliss-32 V4.0-742 DISK\$VMSMASTER:[EDT.SRC]XLATE.B32;1 Page (2)
51 0050 52 0051 53 0052 53 0054 55 0056 56 0057 58 0057 58 0058 60 0059 61 0060 62 0061 63 0062 64 0197 65 0198 66 0199 67 0200 68 0201 69 0203 71 72 72 73 74 0206 77 75 76 77 78 77 78 77 78 0211 79 80 81	TABLE OF CONTENTS: FORWARD ROUTINE EDTSXLATE: INCLUDE FILES: REQUIRE 'EDTSRC:EDTREQ'; MACROS: NONE EQUATED SYMBOLS: NONE OWN STORAGE: NONE EXTERNAL REFERENCES: in the routine	14-36P-1704 12-23-30	DISROVINSHASTERILEDI.SRESALATE.BSZ, T

_\$2

LOA

EMU

EMU

LOA

```
F 5
16-Sep-1984 02:20:59
14-Sep-1984 12:25:56
EDTSXLATE
                     EDT$XLATE - Default XLATE routine EDT$XLATE - default XLATE command
                                                                                                                      VAX-11 Bliss-32 V4.0-742
DISK$VMSMASTER: [EDT. SRC]XLATE.B32;1
                     0215
0216
0217
0218
0219
                                *SBTTL 'EDT$XLATE - default XLATE command'
   GLOBAL ROUTINE EDT$XLATE (
                                                                                                 ! Default XLATE command
                                                                                                ! String to be XLATEd
                                     DESC
                                     ) =
                                  FUNCTIONAL DESCRIPTION:
                                          This routine is the default EDT XLATE routine. It is entered when the user has not supplied an XLATE routine. It simply returns the error code for invalid subcommand.
                                  FORMAL PARAMETERS:
                                           DESC
                                                     - Descriptor passed with xlate string (unused)
                                   IMPLICIT INPUTS:
                                           NONE
                                   IMPLICIT OUTPUTS:
                                           NONE
                                   COMPLETION STATUS:
                                          EDT$_INVSUBCOM
                                  SIDE EFFECTS:
                                           NONE
                                     BEGIN
                                     MESSAGES ((INVSUBCOM));
                                     RETURN (EDT$_INVSUBCOM);
                                                                                                 ! of routine EDT$XLATE
                                                                                                             EDT$XLATE EDT$XLATE - Default XLATE routine \v04-000\
                                                                                                   .TITLE
                                                                                                             EDTS_INVSUBCOM
                                                                                                   .PSECT
                                                                                                              _EDT$CODE,NOWRT, SHR, PIC,2
                                                                         0000 00000
00 00002
04 00009
                                                                                                             #EDT$XLATE, Save nothing #EDT$_INVSUBCOM, RO
                                                                                                    .ENTRY
                                                    50 00000000G
                                                                                                   MOVL
                                                                                                   RET
: Routine Size: 10 bytes.
                                        Routine Base: _EDT$CODE + 0000
```

122

0254 1 0255 1 !<BLF/PAGE> _\$2

Pse

\$\$\$

HAN

PC_

RES

_VA

_VA

_VA

EDTSXLATE EDT\$XLATE - Default XLATE routine EDT\$XLATE - default XLATE command VAX-11 Bliss-32 V4.0-742 DISK\$VMSMASTER:[EDT.SRC]XLATE.B32;1 Page (4) ! of module EDT\$XLATE 0 ELUDOM PSECT SUMMARY Name Bytes Attributes _EDT\$CODE 10 NOVEC, NOWRT, RD , EXE, SHR, LCL, REL, CON, PIC, ALIGN(2) Library Statistics ----- Symbols -----Pages Processing File Total Loaded Percent Mapped Time _\$255\$DUA28:[EDT.SRC]EDT.L32;1 _\$255\$DUA28:[EDT.SRC]PSECTS.L32;1 377 40 00:00.2

_\$2

Pse

VA

_VA

COMMAND QUALIFIERS

BLISS/CHECK=(FIELD, INITIAL, OPTIMIZE)/NOTRACEBACK/LIS=LISS:XLATE/OBJ=OBJS:XLATE MSRCS:XLATE.B32/UPDATE=(ENHS:XLATE)

; Size: 10 code + 0 data bytes; Run Time: 00:03.8; Elapsed Time: 00:05.3; Lines/CPU Min: 4106; Lexemes/CPU-Min: 7607; Memory Used: 15 pages; Compilation Complete

0142 AH-BT13A-SE

DIGITAL EQUIPMENT CORPORATION CONFIDENTIAL AND PROPRIETARY

